


PVC PARALLEL RADIAL GRATE, 6" to 10" AND 12" to 18" WIDTHS IN 1" INCREMENTS.  
NON-SKID SURFACE, 37.5 FLOW SPACE  
ASTM G-154, 750 HOURS UV  
ASTM E-661092 LOAD TO FAILURE AND DEFLECTION @ 200 lbs  
ASTM C-1028 STATIC COEFFICIENT OF FRICTION, WET AND DRY  
GRATE TECHNOLOGIES® (800) 897-6160



STAINLESS STEEL CLIPS AND  
TAMPER PROOF FASTENERS  
AT 3 FOOT INTERVALS

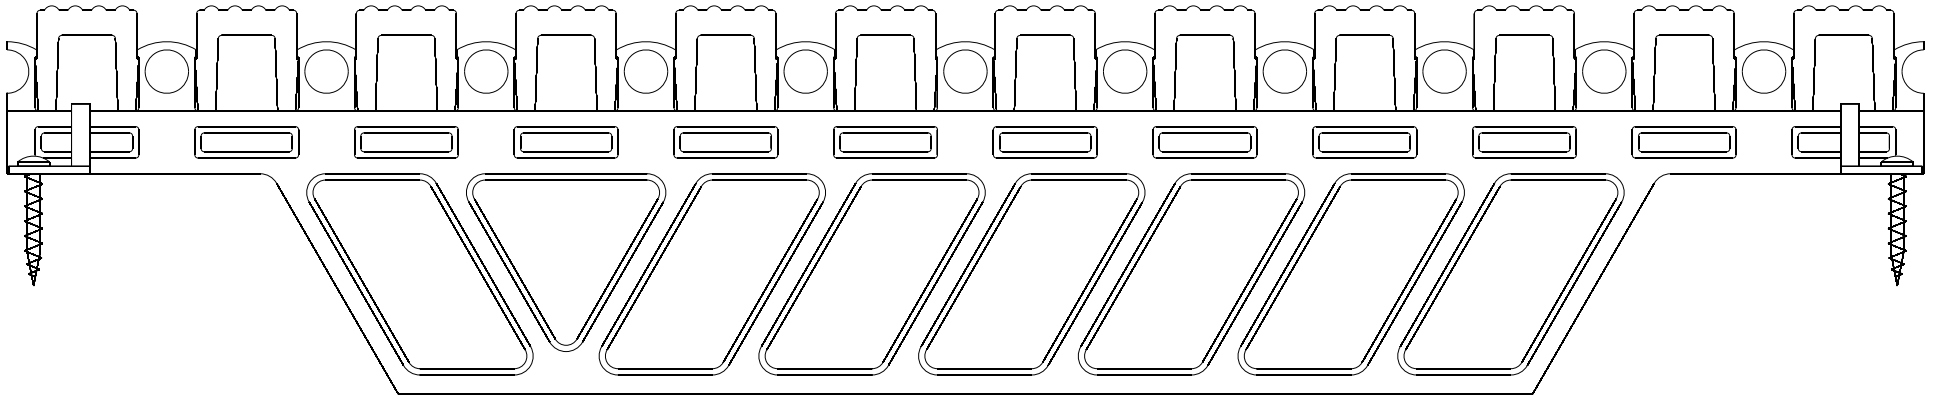

(800) 897-6160 [www.gratetech.com](http://www.gratetech.com)

Copyright 2006 LawsonAquatics, Inc.  
All rights reserved.