


PVC PERPENDICULAR "I" BAR GRATE, 14" to 20" WIDTHS IN 1" INCREMENTS.
NON-SKID SURFACE, 35 FLOW SPACE
ASTM G-154, 750 HOURS UV
ASTM E-661092 LOAD TO FAILURE AND DEFLECTION @ 200 lbs
ASTM C-1028 STATIC COEFFICIENT OF FRICTION, WET AND DRY
GRATE TECHNOLOGIES® (800) 897-6160



STAINLESS STEEL CLIPS AND
TAMPER PROOF FASTENERS
AT 3 FOOT INTERVALS

PVC ANGLES SECURED TO CONCRETE
AT 18 INCH (max.) INTERVALS WITH
PLUGS AND STAINLESS STEEL SCREWS
GRATE TECHNOLOGIES® (800) 897-6160

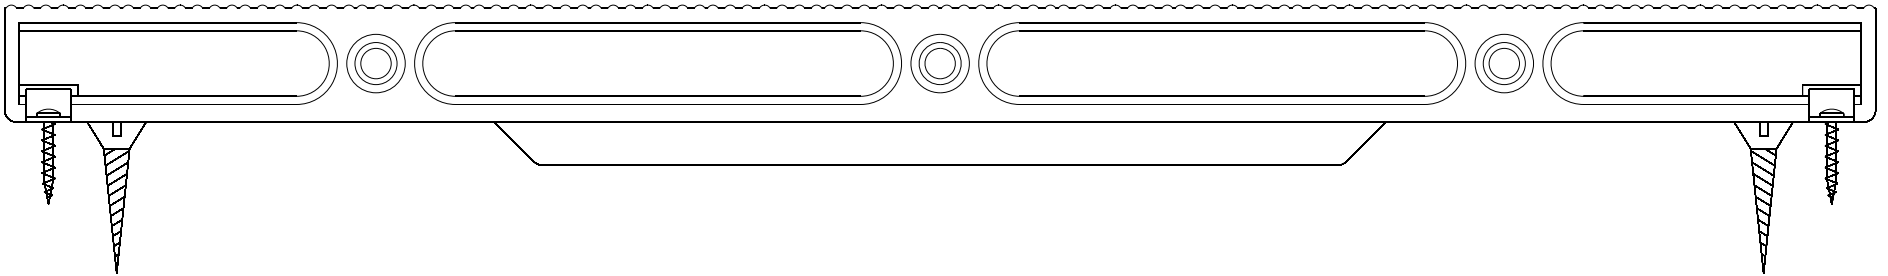

(800) 897-6160 www.gratetech.com

Copyright 2006 Lawson Aquatics, Inc.
All rights reserved.